


TDS TECHNICAL DATA SHEET

PSM 17 - Parking sensor masking discs 60 pcs. (3x20pcs)

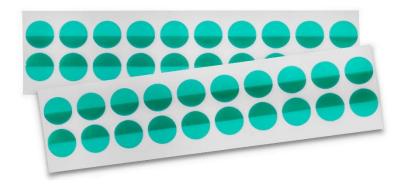

Product Description

Fast, easy and time saving masking of the parking sensor and rubber seals. The special adhesion on the PSM makes it possible to leave it during the complete repair process giving a high customer satisfaction in preventing several damages like sanding, painting and polishing and avoid sensor needing recalibration which is time saving.

Product features

- Fast and easy application
- Special adhesive
- Protects agains damages from sanding, polishing or painting
- Can be left on the sensor during the complete repair process

Application

- Make sure the sensor is dust and grease free.
- Apply the PSM to the sensor by using the wings.
- Make the necessary repairs.
- Remove the PSM using the wings

Shelf life and storage

Shelf life : One year Storage: Store in a dry and well ventilated area, (22°C / 72°F @50% relative humidity)

The above information is given in good faith, but the user should assure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Chemicar Europe cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications.

Chemicar Europe nv Baarbeek 2 2070 Zwijndrecht België-Belgium T.: +32 3 234 87 80 F.: +32 3 234 87 89 info@chemicar.eu www.chemicar.eu